

环境科学

(HUANJING KEXUE)

ENVIRONMENTAL SCIENCE

第33卷 第5期

Vol.33 No.5

2012

中国科学院生态环境研究中心 主办
科学出版社 出版



目次

区域空气质量模拟中查表法的应用研究 谢旻,王体健,江飞,李树,蔡彦枫,庄炳亮(1409)

长江三角洲地区秸秆露天焚烧大气污染物排放清单及其在空气质量模式中的应用 苏继峰,朱彬,康汉青,王红磊,王体健(1418)

北京及周边城市一元脂肪酸大气颗粒物干沉降通量及来源分析研究 徐小娟,李杏茹,王跃思,刘晨书,潘月鹏,王英锋(1425)

上海大气超细颗粒物和工业纳米颗粒的表征及细胞毒性的比较研究 张睿,吕森林,尚羽,易飞,任晶晶,郝晓洁,安静,吴明红(1431)

青岛市大气 PM_{2.5} 元素组成及来源研究 李秀镇,盛立芳,徐华,屈文军(1438)

冬季天津家庭室内空气颗粒物中邻苯二甲酸酯污染研究 王夫美,陈丽,焦姣,张雷波,姬亚芹,白志鹏,张利文,孙增荣,张星梅(1446)

再悬浮装置在大气 PM_{2.5} 源谱分析中的应用 段恒轶,钱冉冉,吴水平,印红玲(1452)

黔西南煤燃烧产物微量元素分布特征及富集规律研究 魏晓飞,张国平,李玲,项萌,蔡永兵(1457)

三峡水库不同运行状态下支流澎溪河水-气界面温室气体通量特征初探 蒋滔,郭劲松,李哲,方芳,白镭,刘静(1463)

香溪河库湾夏季温室气体通量及影响因素分析 王亮,肖尚斌,刘德富,陈文重,王雨春,陈小燕,段玉杰(1471)

臭氧浓度升高与土壤湿度对农田土壤微生物呼吸温度敏感性的影响 陈书涛,张勇,胡正华,史艳妹,沈小帅(1476)

托木尔峰青冰滩 72 号冰川径流水化学特征初步研究 赵爱芳,张明军,李忠勤,王飞腾,王圣杰(1484)

五大连池水溶性有机磷矿化特性的研究 张斌,席北斗,赵越,魏自民,白雪,王曼林(1491)

7 条环太湖河流沉积物氮含量沿程分布规律 卢少勇,远野,金相灿,焦伟,吴瑶洁,任德有,周羽化,陈雷(1497)

巢湖十五里河沉积物氮磷形态分布及生物有效性 李如忠,李峰,周爱佳,童芳,钱家忠(1503)

北运河系地表水近 10 年来水质变化及影响因素分析 郭婧,荆红卫,李金香,李令军(1511)

东莞运河排涝对东江河水水质影响分析 孙磊,毛献忠,黄旻旻(1519)

北京平原区地下水污染源识别与危害性分级 陆燕,何江涛,王俊杰,刘丽雅,张小亮(1526)

地下水曝气修复过程的三维数值模拟 李恒震,胡黎明,王建,武晓峰,刘培斌(1532)

垂向水动力扰动机的蓝藻控制效应数值实验研究 邹锐,周璟,孙永健,嵇晓燕,岳佳,刘永(1540)

新型生物岛栅中污染物去除的微生物机制研究 高明瑜,谢慧君,王文兴(1550)

营养盐水平对念珠藻胞外有机物产生的影响 齐飞,刘晓媛,徐冰冰,黄岳,封莉,张立秋(1556)

水网藻种植水对铜绿微囊藻生长的抑制作用研究 傅海燕,柴天,赵坤,刘智峰,张明真,侯明,许鹏成(1564)

酞酸酯在模拟海河菹草微宇宙中的消减和分布特征 迟杰,杨青(1570)

电子束辐射对铜绿微囊藻毒素产生和释放的抑制作用研究 刘书宇,吴明红,姜钦鹏(1575)

青铜峡灌区典型排水沟水污特征解析 李强坤,胡亚伟,罗良国(1579)

四溴双酚 A 的辐照降解研究 李杰,徐殿斗,马玲玲,吴明红(1587)

污泥基活性炭催化臭氧氧化降解水中微量布洛芬的效能研究 王红娟,齐飞,封莉,张立秋(1591)

高水力负荷对人工湿地处理精养虾塘排水效果的影响 李怀正,章星异,陈卫兵,叶剑峰(1597)

城市污水生物脱氮系统出水经氯胺消毒形成 NDMA 的影响因素研究 尚晓玲,李咏梅(1604)

利用淀粉基共混物作为反硝化固体碳源的研究 沈志强,吴为中,杨春平,陈佳利,王建龙(1609)

好氧污泥颗粒化过程中 Zeta 电位与 EPS 的变化特性 王浩宇,苏本生,黄丹,崔晓娟,竺建荣(1614)

活性污泥对病毒的生物吸附特性 周玉芬,郑祥,雷洋,陈迪(1621)

阴离子型聚丙烯酰胺在离子交换膜上的吸附规律 邓梦洁,于水利,时文歆,衣雪松(1625)

两性修饰膨润土对苯酚的吸附及热力学特征 李婷,孟昭福,张斌(1632)

表面活性剂对苯并[a]芘在黑炭表面吸附解吸的影响 张景环,陈春溶,张玮航,栗桂州(1639)

南京市 4 个污水处理厂的活性污泥中细菌的分离鉴定和抗生素耐药性分析 葛峰,郭坤,周广灿,张会娟,刘济宁,戴亦军(1646)

焦化废水中苯酚降解菌筛选及其降解性能 陈春,李文英,吴静文,李静(1652)

Xanthobacter flavus DT8 降解二噁烷的特性研究 金小君,陈东之,朱润晔,陈静,陈建孟(1657)

未开发油气田地表烃氧化菌空间定量分布 满鹏,齐鸿雁,呼庆,马安周,白志辉,庄国强(1663)

矿化垃圾中氧化甲烷兼性营养菌的筛选与生物特性研究 赵天涛,项锦欣,张丽杰,全学军,赵由才(1670)

长江中游干流及 22 条支流表层水中多氯联苯的分布特征及其潜在风险 李昆,赵高峰,周怀东,曾敏,廖柏寒,吴正勇,张盼伟,郝红(1676)

典型血吸虫病疫区表层水中酚类化合物的污染特征及潜在风险 吴正勇,赵高峰,周怀东,李科林,曾敏,李昆,张盼伟,郝红(1682)

闽江福州段沉积物中多环芳烃的空间分布异质性研究 陈卫锋,倪进治,杨红玉,魏然,杨玉盛(1687)

三峡库区蓄水运用期表层沉积物重金属污染及其潜在生态风险评价 王健康,高博,周怀东,陆瑾,王雨春,殷淑华,郝红,袁浩(1693)

典型电器工业区河涌沉积物中重金属的分布和潜在生态风险 邓代永,孙国萍,郭俊,张宏涛,张琴,许玫英(1700)

密云水库上游金属矿区土壤中重金属形态分布及风险评价 高彦鑫,冯金国,唐磊,朱先芳,刘文清,季宏兵(1707)

湘西花垣矿区土壤重金属污染及其生物有效性 杨胜香,袁志忠,李朝阳,龙华,唐文杰(1718)

基于 GIS 的某训练场土壤重金属污染评价 刘玉通,方振东,杨琴,谢朝新,王大勇,毛华军(1725)

土壤质地和湿度对 SVE 技术修复苯污染土壤的影响 刘少卿,姜林,姚玉君,李艳霞,刘希涛,林春野(1731)

蒙脱土、高岭土和针铁矿对 DNA 吸附与解吸特征 王慎阳,饶伟,王代长,张亚楠,李腾,唐冰培,杨世杰(1736)

LNAPL 在砂质含水层中动态迁移的电阻率法监测试验研究 潘玉英,贾永刚,郭磊,李进军,单红仙(1744)

亚临界水解预处理稻草秸秆制备活性炭及表征 董宇,申哲民,雷阳明,王茜,刘婷婷(1753)

蓝藻好氧堆肥及其氮素损失控制的研究 任云,崔春红,刘奋武,占新华,周立祥(1760)

固定化微生物技术修复 PAHs 污染土壤的研究进展 钱林波,元妙新,陈宝梁(1767)

《环境科学》征订启事(1483) 《环境科学》征稿简则(1620) 信息(1490,1496,1586,1743)

再悬浮装置在大气 PM_{2.5} 源谱分析中的应用

段恒轶^{1,2}, 钱冉冉^{1,2}, 吴水平^{1,2*}, 印红玲³

(1. 厦门大学近海海洋环境科学国家重点实验室, 厦门 361005; 2. 厦门大学环境科学与工程系, 厦门 361005; 3. 成都信息工程学院资源环境学院, 成都 610225)

摘要: 为解决 PM_{2.5} 源解析中无组织排放源的采样问题, 在前人基础上发展了一套简便高效的再悬浮采集装置, 并对进样量、再悬浮时间等关键运行参数进行了优化, 总结了无组织排放源采样分析流程. 重复测试表明, 双切割头的 PM_{2.5} 捕集量偏差 < 8%, 粒径分布比率变化不超过 5%, 显示出再悬浮装置良好的采样平行性和稳定性. 将该装置应用于陶瓷工业尘、公路扬尘和二次降尘等 3 类无组织排放尘及生物质燃烧的源排放再悬浮采样分析, 获得了各颗粒源的粒径分布谱和 PM_{2.5} 无机成分谱, 以此对各排放源特征进行有效区分. PM_{2.5} 平行样中各化学成分浓度偏差 < 15%. 与其他装置相比, 本研究介绍的再悬浮装置简便经济, 具有较高的采样效率, 在无组织尘排放源谱分析中具有较高的实用价值.

关键词: 再悬浮装置; 源谱; 无组织排放尘; PM_{2.5}; 源解析

中图分类号: X513 文献标识码: A 文章编号: 0250-3301(2012)05-1452-05

Application of a Resuspension Test Chamber in PM_{2.5} Source Profile Analysis

DUAN Heng-yi^{1,2}, QIAN Ran-ran^{1,2}, WU Shui-ping^{1,2}, YIN Hong-ling³

(1. State Key Laboratory of Marine Environmental Science, Xiamen University, Xiamen 361005, China; 2. Department of Environmental Science and Engineering, Xiamen University, Xiamen 361005, China; 3. College of Resources and Environment, Chengdu University of Information Technology, Chengdu 610225, China)

Abstract: A resuspension chamber was developed and optimized to obtain PM_{2.5} fraction from fugitive sources. In accordance, a basic protocol of sampling and analysis was concluded. Replicate tests showed that mass deviation of PM_{2.5} between two sampling cascade impactors was less than 8% and size distribution ratios varied by no more than 5%, indicating good sampling parallelism and stability. Chemical profiles and size distribution of three kinds of fugitive dusts (paved road dust, secondary dust and ceramic industrial dust) as well as biomass burning emission had been measured based on the above chamber. The relative standard deviations (RSD%) of inorganic elements in duplicate PM_{2.5} samples were less than 15%. Comparing with other devices, the resuspension chamber described in this study features convenience and efficiency, and has a high practical value in the source sampling of fugitive dust.

Key words: resuspension chamber; source profile; fugitive dust; PM_{2.5}; source apportionment

PM_{2.5} 作为气溶胶的重要组分, 对人群健康及大气辐射传输均有重要影响. 来源解析显示无组织排放源对大气 PM_{2.5} 的贡献约 5% ~ 40%^[1-3], 了解这类尘源的化学特征对大气 PM_{2.5} 的源解析具有重要意义. 对于土壤风沙尘、道路扬尘、建筑扬尘、工业粉尘等无组织排放源, 因其排放面大、强度低、受周边环境干扰强, 故实地采样往往难以获得具有代表性的样品. 而目前的筛分技术也很难得到 PM₁₀ 乃至粒径更小的颗粒物. 为解决这一问题, Chow 等^[4] 研制了一套再悬浮采集装置, 将采集的尘源样品送入混合箱中再悬浮, 并经箱底设置采样切割头获得分粒径的颗粒样品. 这种设计避免了采样区域的环境干扰, 采样效率较高, 被较多应用于无组织排放源的采样中. Carvacho 等^[5-7] 设计了再悬浮与混合相分离的小型采集装置, 并测定了土壤排放 PM₁₀ 和 PM_{2.5} 的最大潜势. 陈魁等^[8,9] 搭建了颗粒物再悬浮采样

器, 并对采样均匀性进行了探讨. Amato 等^[10] 使用真空吹扫装置现场采集公路尘中的 PM₁₀, 避免了实验室采集带来的细粒子损失, 但环境因素的影响往往使结果具有较大不确定性. Han 等^[11] 使用车载捕集系统在线收集公路尘中的 PM_{2.5}, 但无法获得特定点的尘样, 且耗时较长, 不适于其他无组织排放尘采样. 本研究在前人基础上, 对再悬浮采集装置进行改进、测试并获取了装置的最优运行参数. 利用该装置对晋江市磁灶镇的陶瓷工业粉尘、路面扬尘和福州市公路尘等样品进行处理, 得到各尘源中 PM_{2.5} 的化学成分谱, 评估装置的应用前景.

收稿日期: 2011-07-29; 修订日期: 2011-09-18

基金项目: 环保公益性行业科研专项(201009004); 国家自然科学基金基金项目(40971257)

作者简介: 段恒轶(1989~), 男, 主要研究方向为大气环境化学, E-mail: duanhengyi2007@163.com

* 通讯联系人, E-mail: wsp@xmu.edu.cn

1 材料与方法

1.1 再悬浮装置构造及原理

再悬浮采样装置由亚克力 (Acrylics) 板制作的密闭混合箱、进样气路和平行采样器三部分构成 (图 1)。实际操作中,一定量 (2 ~ 5 g) 经过筛 (150 目)、干燥的尘源样品被置于不锈钢滤网构成的进样头中,并由过滤后的洁净空气吹入混合箱中,进样流速 28.3 L·min⁻¹。颗粒物于混合箱中再悬浮 10

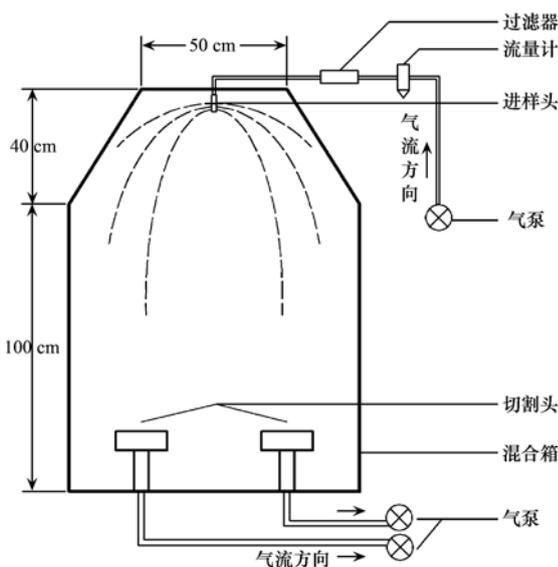


图 1 再悬浮装置结构示意图

Fig. 1 Schematic of the dust resuspension chamber

表 1 不同进样量和不同采样时间条件下粒径分布稳定性 ($n=5$)

Table 1 Size distributions under different inlet mass and sampling time ($n=5$)

| 项目 | 不同进样量 | | | 不同采样时间 | | |
|--------|----------------------|----------------------|-------------------|----------------------|----------------------|-------------------|
| | PM ₁₀₋₁₀₀ | PM _{2.5-10} | PM _{2.5} | PM ₁₀₋₁₀₀ | PM _{2.5-10} | PM _{2.5} |
| 质量贡献/% | 9.78 | 44.42 | 45.8 | 13.03 | 43.8 | 43.17 |
| SD | 1.02 | 1.99 | 1.87 | 1.75 | 1.66 | 0.48 |
| CV/% | 10.4 | 4.48 | 4.09 | 13.42 | 3.79 | 1.11 |

1.2.3 装置本底

每次再悬浮采样后,使用超纯水对混合箱进行喷淋,使悬浮颗粒快速沉降。混合箱内壁用洁净抹布擦净,并启动箱底气泵抽气 10 min (流速 100 L·min⁻¹) 以净化箱内空气。清洗后 PM_{2.5} 和 PM₁₀ 残留量均小于 0.5 mg,清除率 > 95% (表 2),有效减少了混合箱本底对实际尘样采集的干扰。

1.3 源样采集

用于再悬浮实验的无组织尘样主要来自福建省晋江市磁灶镇及福州市区。磁灶当地瓷土资源丰富,陶瓷生产企业密集,为全国四大陶瓷生产基地之一。磁灶镇的大部分陶瓷企业设备简陋,工艺落后,粉尘

min 后,由箱底 2 个三级切割头 (武汉天虹) 平行采集,采样时间 10 min,采样流速 100 L·min⁻¹,从而获取 PM_{2.5} (粒径 ≤ 2.5 μm)、PM_{2.5-10} (2.5 μm < 粒径 ≤ 10 μm) 和 PM₁₀₋₁₀₀ (10 μm < 粒径 ≤ 100 μm) 这 3 个粒径范围的石英和聚丙烯滤膜样品。

1.2 装置效果评估

再悬浮采样的关键在于采样的足量性、均匀性和高效性。针对这些要求,本研究根据颗粒物 (以水泥粉末为实验颗粒) 捕集量、粒径分布一致性、采样稳定性等指标对装置的关键运行参数进行了测试和优化,并对采样效果进行了评估。

1.2.1 采样效率

在优化条件下,使用水泥粉末进行多次测试 (进样量 3 g),PM_{2.5} 捕集量为 5 ~ 20 mg,满足化学分析要求。一个完整的再悬浮箱内部清洗-颗粒再悬浮-采样流程需要时间约 50 min,具有较高的工作效率。

1.2.2 粒径分布稳定性和采样均匀性

在不同进样量 (1.0 ~ 8.0 g) 和采样时间 (5 ~ 30 min) 条件下进行再悬浮实验,所捕集的颗粒物粒径分布保持相对稳定,PM_{2.5} 与 PM_{2.5-10} 所占百分比变化幅度不超过 5% (表 1)。再悬浮实验间隔 3 d 进行重复实验,同样进样量和采样时间条件下,双切割头采集的 PM_{2.5} 质量变化不超过 8%,显示该再悬浮装置具有良好的采样均匀性与稳定性。

表 2 清洗操作对再悬浮装置 PM_{2.5} 和 PM₁₀ 本底的影响

Table 2 Influence of cleanup on the PM_{2.5} and PM₁₀

| 进样量 /g | background in the resuspension chamber | | | | | |
|-----------|--|-------------------|----------------------|-------------------|----------------------|-------------------|
| | 捕集量/mg | | 清洗后本底/mg | | 清除率/% | |
| | PM _{2.5-10} | PM _{2.5} | PM _{2.5-10} | PM _{2.5} | PM _{2.5-10} | PM _{2.5} |
| 1.0 | 6.26 | 5.79 | 0.29 | 0.23 | 95.4 | 96.0 |
| 2.0 | 10.70 | 12.07 | 0.00 | 0.44 | 100.0 | 96.4 |
| 3.0 | 15.23 | 16.76 | 0.00 | 0.45 | 100.0 | 97.3 |
| 5.0 | 20.26 | 21.09 | 0.33 | 0.23 | 98.4 | 98.9 |
| 8.0 | 27.41 | 26.77 | 0.09 | 0.34 | 99.7 | 98.7 |

污染严重。陶瓷烧制过程中使用原煤,煤烟在无控制条件下大量排放。在瓷砖等陶瓷产品外运过程中,来往货车排放的尾气及路面二次扬尘的影响也非常严

重. 鉴于以上考虑,在磁灶镇采集 4 类共 7 种无组织尘源样品,在福州市区采集公路尘样品共 17 份,同时进行生物质燃烧排放实验(表 3).

采集尘样时使用塑料刷和塑料铲从采样点扫取具有代表性的尘样,采样面积 1~2 m²,每个采样点采集 2~3 份加以混合(路面尘需要在道路两边各

采一份). 采集到的混合样转入密实袋中编号密封保存. 再悬浮实验前,尘样过 150 目标准筛以获取粒径 <100 μm 的组分,过筛后的样品置于恒温恒湿箱(20℃,湿度 20%)中干燥 24 h 以上以去除其中的水分,避免高温烘烤以尽量减少硝酸盐和有机碳等挥发性组分的流失^[12].

表 3 采样点周围环境

Table 3 Descriptions of dust sampling sites

| 排放源类型 | 采样点 | 采样描述 |
|-----------------------------|--------|--------------------|
| 制陶粉尘 | 源利陶瓷厂 | 釉面砖加工作坊,采原料土 |
| | 霞灶瓷砖仓库 | 墙面砖、防火砖仓库,采地面积尘 |
| 公路尘 | 华兴陶瓷厂前 | 车流量大,以瓷砖和原煤运输车辆为主 |
| | 磁灶镇主干道 | 车流量大,货车与摩托车为主 |
| 二次降尘 | 粮店招待所 | 窗台积尘,招待所位于市集内 |
| | 磁灶中心小学 | 栏杆积尘,小学周围为陶瓷生产企业 |
| 生物质燃烧 | 厦门大学校园 | 木材燃烧 |
| | 厦门大学校园 | 树叶燃烧 |
| 其他 | 石材堆放 | 露天石材加工厂,采石材堆积碎屑 |
| 磁灶大气 PM _{2.5} (受体) | 磁灶中心小学 | 周围有 5 个家庭作坊式陶瓷生产企业 |
| 城市主干道公路尘 | 福州内环路 | 交通密集区 |

1.4 无组织尘再悬浮样品的化学成分分析

每个尘样的再悬浮同时采用聚丙烯和石英滤膜(滤膜直径 88 mm)进行平行采集,聚丙烯滤膜用于无机元素的分析,而石英滤膜用于碳成分和水溶性离子的分析. 使用日本岛津 XRF-1800 X 射线荧光光谱仪测定 PM_{2.5} 中 26 种无机元素的含量,采用 Micromatter 公司的标准滤膜进行单点定量(元素标定含量为 50 μg·cm⁻²),最后结果经干净的聚丙烯滤膜的测量结果作空白校正^[13,14]. 取 1/4 张石英滤膜,用超纯水浸泡过夜,超声抽提 1 h,过 0.2 μm 滤膜后上机进行水溶性离子的检测. PIC-10A 双通道离子色谱仪(青岛普仁)可同时测定 6 种阳离子(Li⁺、Na⁺、NH₄⁺、K⁺、Mg²⁺、Ca²⁺)和 5 种阴离子(F⁻、Cl⁻、NO₃⁻、PO₄³⁻、SO₄²⁻),测量结果用 AccuStandard 公司的离子色谱混标进行定量,结果经回收率和空白校正^[15].

2 结果与讨论

2.1 尘源粒径分布

重量分析显示,不同来源的无组织尘的粒径分布存在较为明显的差异(图 2). 陶瓷生产粉尘以 PM₁₀ 贡献为主,其中 PM_{2.5} 重量占总重量的 36.4%,PM_{2.5-10} 占 54.0%,而生物质燃烧产生的颗粒物绝大部分为 PM_{2.5},相对贡献占 90% 以上. 作为混合源的二次降尘,粒径分布比较均匀,PM_{2.5} 占 40.8%、PM_{2.5-10} 占 37.2%、PM₁₀₋₁₀₀ 占 22.1%,显示出其复

杂的来源特征. 同样为混合源的道路尘,则以细颗粒物为主,PM_{2.5-10} 和 PM_{2.5} 的相对贡献远高于 PM₁₀₋₁₀₀,这可能源于繁忙的交通所造成的路面磨损和大量尾气排放的影响.

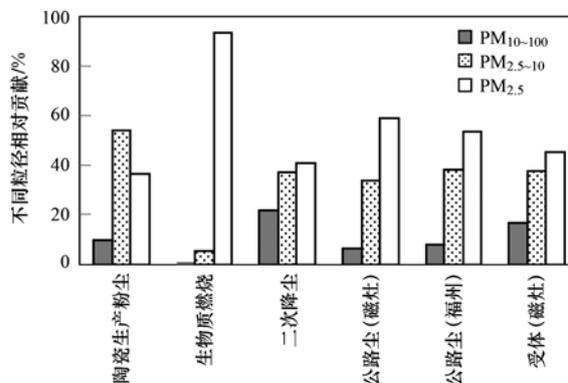


图 2 不同来源颗粒物的粒径分布

Fig. 2 Size distribution of different dusts

2.2 化学成分谱分析

从整体上看,制陶粉尘、二次降尘和公路尘释放的 PM_{2.5} 中无机组分占 21%~33%,其中 Si、Al、Mg、Fe 这 4 种地壳元素占无机组分总量的 50%~80%(表 4),且呈现高 Al(>40 mg·g⁻¹)、Fe(>20 mg·g⁻¹),低 Mg(<7 mg·g⁻¹)的特征,与当地黏土成分相似^[16],表现出较强的地壳来源特征. 相反的,生物质燃烧来源的 PM_{2.5} 仅含 3.8% 的无机元素和离子,且 4 种主要地壳元素只占无机成分的 1.7%,说明 PM_{2.5} 的主要贡献为有机碳成分.

Na 和 Cl 在无组织排放尘源谱中丰度很低,仅占 0.01% ~ 3%, NO₃⁻、NH₄⁺ 和 SO₄²⁻ 浓度则随排放源不同存在较大变异. K 元素既可能来自于地壳,也可能来自于人为活动. 燃烧源所贡献的 K 一般以离子态存在,这部分 K⁺ 约占大气颗粒物中 K⁺ 的 80% ~ 90%^[17]; 而土壤中的 K 则以矿物态 K 为主,占土壤全 K 的 90% 以上^[18]. 所以,总 K 与离子态 K 之比

(K/K⁺) 可以作为区分地壳源与燃烧源的指标之一. Watson 等^[19] 分析 Denver 地区无组织排放尘源谱后指出,无组织排放尘中的总 K 含量一般为 K⁺ 的 10 ~ 30 倍. 本研究中,混合源的 K/K⁺ 为 3.1 ~ 7.4,而制陶粉尘作为一次地壳源, K/K⁺ 高达 31.6. 生物质燃烧源谱中的 K/K⁺ 最低,为 2.8,但高于 Watson 等^[20] 的测定结果 (K/K⁺ = 1.2).

表 4 PM_{2.5} 化学成分谱Table 4 Chemical profile of PM_{2.5} from different sources

| 尘源 | 无机组分的比重/% | 优势组分 | Si/Al | Si/Mg | K/K ⁺ | 地壳元素的相对贡献 ¹⁾ /% |
|--------|-----------|---|-------|-------|------------------|----------------------------|
| 制陶粉尘 | 28.7 | Si、Al、Fe | 2.1 | 78.6 | 31.6 | 77.6 |
| 生物质燃烧 | 3.8 | K、Cl | — | — | 2.8 | 1.7 |
| 二次降尘 | 25.1 | Si、SO ₄ ²⁻ | 2.5 | 23.7 | 5.3 | 50.1 |
| 道路(磁灶) | 29.2 | Si、Al、Cl | 2.0 | 34.5 | 3.1 | 60.4 |
| 道路(福州) | 33.9 | Si、Al、Ca | 2.3 | 27.5 | 7.4 | 54.1 |
| 受体(磁灶) | 22.0 | SO ₄ ²⁻ 、NH ₄ ⁺ | 2.7 | 24.6 | 1.1 | 16.4 |

1) 地壳元素指 Si、Al、Mg 和 Fe

制陶粉尘的 PM_{2.5} 成分谱以 Si、Al、Fe、K 等地壳元素为主,水溶性离子含量甚微. 公路尘源谱中,地壳元素仍占相当比重,但已明显小于纯粹地壳来源的陶瓷生产;代表二次粒子贡献的 NO₃⁻ 和 SO₄²⁻ 分别占无机组分总量的 11.6% (磁灶)、9.8% (福州) 和 5.6% (磁灶)、6.1% (福州),显示出汽车尾气和酸沉降对公路尘源的影响. Zn 作为轮胎硫化剂,会随着轮胎的磨损进入公路尘中^[21],故而在繁忙路段的公路尘往往具有较高的 Zn 含量. 福州公路尘源谱中, Zn 比重达 2.02%, 远高于其他排放源 (<0.11%), 但磁灶公路中的 Zn 富集则不明显. Pb 一度是尾气排放的标志物^[22], 但中国于 2001 年起禁止使用含铅汽油,道路尘中的 Pb 含量有所降低. 磁灶和福州公路尘中 Pb 含量分别为 0.41 mg·g⁻¹ 和 0.97 mg·g⁻¹, 低于香港水平^[23].

同样属于混合源的二次降尘,成分谱构成与公路尘相似. 但值得注意的是,二次降尘中 SO₄²⁻ 比重达 14.4%, SO₄²⁻/NO₃⁻ 为 1.6 ~ 2.3, 显示出较强的大气二次粒子输入特征. 而公路尘受尾气中 NO_x 排放影响, SO₄²⁻/NO₃⁻ 接近于 1.

生物质燃烧排放以 K、Cl 显著高于其它成分为特征,两者含量约占无机组分含量的 74.2%. 同时,生物质燃烧对大气 PM_{2.5} 中 NH₄⁺ 也具有一定贡献,其在生物质燃烧排放源中相对含量约为 17.5%.

2.3 质量控制

所有公路尘样品均使用再悬浮装置进行重复实验. 由表 5 所列数据可见,同一样品重复再悬浮采样

所获得的 PM_{2.5} 和 PM_{2.5-10} 重量标准偏差 < 0.000 5 g, 所测定 35 种无机组分的平行样相对偏差不超过 15%. 对平行样各组分浓度值进行相关性分析,在 P = 0.01 显著水平下正相关 (R² > 0.94), 说明该装置具有良好的稳定性和重复性.

表 5 公路尘再悬浮采样平行性

Table 5 Parallel misalignment of road dust resuspension test

| 采样点 | 捕集量标准偏差/g | | PM _{2.5} 化学成分谱平行性 | |
|----------|----------------------|-------------------|----------------------------|----------------|
| | PM _{2.5-10} | PM _{2.5} | 相对偏差/% | R ² |
| 磁灶华兴陶瓷公路 | 0.000 45 | 0.000 34 | 4.1 | 0.978 2 |
| 磁灶主干道 | 0.000 09 | 0.000 25 | 14.1 | 0.989 9 |
| 福州公路 F1 | 0.000 19 | 0.000 37 | 10.6 | 0.993 8 |
| 福州公路 F5 | 0.000 24 | 0.000 17 | 0.7 | 0.941 0 |
| 福州公路 F10 | 0.000 08 | 0.000 05 | 10.1 | 0.990 2 |
| 福州公路 F11 | 0.000 52 | 0.000 40 | 6.6 | 0.992 1 |
| 福州公路 F13 | 0.000 13 | 0.000 24 | 6.2 | 0.971 7 |
| 福州公路 F14 | 0.000 04 | 0.000 52 | 9.1 | 0.990 3 |

3 结论

(1) 为获得无组织尘中 PM_{2.5} 的源谱特征,在已有再悬浮装置的基础上自制了一套简便高效的再悬浮采样装置,并对进样量、再悬浮时间、采样时间等关键运行条件进行了优化. 将该装置应用于陶瓷生产、公路扬尘、二次降尘及生物质燃烧的源排放采样,获得了 4 类排放源中 PM_{2.5} 的无机成分谱. 测试表明,再悬浮装置在不同进样量和采样时间下粒径分布保持稳定, PM_{2.5-10} 和 PM_{2.5} 占 TSP 的比例变化均小于 5%, 双切割头 PM_{2.5} 捕集量偏差 < 8%, PM_{2.5} 捕集量平行样标准偏差 < 0.000 5 g, 无机组分相对浓度变化 < 15%, 具有很好的均匀性和稳定性. 该装

置的高捕集效率(5~20 mg)和低耗时(<1 h)特性,能满足大气颗粒物源谱分析的要求。

(2) 所获得的 PM_{2.5}成分谱较好地反映了各排放源特征。制陶粉尘的 PM_{2.5}源谱以 Si、Al、Fe 等地壳元素为主要组成,而生物质燃烧源则以 K、Cl、NH₄⁺ 排放为特征。公路尘和二次降尘的源谱均表现为地壳物质、二次粒子的混合特征,但二者 SO₄²⁻/NO₃⁻ 差异反映出其不同的一次来源。

(3) 本研究发展的再悬浮装置能满足无组织排放尘再悬浮的采样要求,但进样系统仍需改进以获取更为均匀稳定的结果。再悬浮过程中,混合箱湿度会影响颗粒物分散效果,内壁的静电吸附会造成细粒子损失,故两者对采样的影响在进一步的实验中需要加以定量评估。同时,无组织尘排放源的采样操作需要进一步规范以减小尘样收集和运输过程中的损失和污染。

参考文献:

- [1] Viana M, Kuhlbusch T A J, Querol X, *et al.* Source apportionment of particulate matter in Europe: A review of methods and results[J]. *Journal of Aerosol Science*, 2008, **39** (10): 827-849.
- [2] Zheng M, Salmon L G, Schauer J J, *et al.* Seasonal trends in PM_{2.5} source contributions in Beijing, China[J]. *Atmospheric Environment*, 2005, **39**(22): 3967-3976.
- [3] Thurston G D, Ito K, Lall R. A source apportionment of U. S. fine particulate matter air pollution [J]. *Atmospheric Environment*, 2011, **45**(24): 3924-3936.
- [4] Chow J C, Watson J G, Houck J E, *et al.* A laboratory resuspension chamber to measure fugitive dust size distributions and chemical compositions[J]. *Atmosphere Environment*, 1994, **28**(21): 3463-3481.
- [5] Carvacho O F, Ashbaugh L L, Matsumura R J, *et al.* Measurement of PM₁₀ potential from agricultural soils using a dust resuspension test chamber[A]. In: *Proceedings, International Conference on Air Pollution from Agricultural Operations* [C]. Midwest Plan Service, Kansas City, MO, 1996.
- [6] Carvacho O F, Ashbaugh L L, Brown M S, *et al.* Relationship between San Joaquin Valley soil texture and PM₁₀ emission potential using the UC Davis dust resuspension test chamber[J]. *Transactions of the American Society of Agricultural Engineers*, 2002, **44**(6): 1603-1608.
- [7] Carvacho O F, Ashbaugh L L, Brown M S, *et al.* Measurement of PM_{2.5} emission potential from soil using the UC Davis resuspension test chamber[J]. *Geomorphology*, 2004, **59**(1-4): 75-80.
- [8] 陈魁, 白志鹏, 朱坦, 等. 颗粒物再悬浮采样器采样均匀度研究[J]. *过程工程学报*, 2004, **4**(Z1): 864-867.
- [9] 陈魁, 白志鹏. 颗粒物再悬浮采样器研制与应用[J]. *环境工程*, 2006, **24**(5): 67-68.
- [10] Amato F, Pandolfi M, Viana M, *et al.* Spatial and chemical patterns of PM₁₀ in road dust deposited in urban environment [J]. *Atmospheric Environment*, 2009, **43**(9): 1650-1659.
- [11] Han S, Youn J S, Jung Y W. Characterization of PM₁₀ and PM_{2.5} source profiles for resuspended road dust collected using mobile sampling methodology [J]. *Atmospheric Environment*, 2011, **45**(20): 3343-3351.
- [12] Vega E, Mugica V, Reyes E, *et al.* Chemical composition of fugitive dust emitters in Mexico City [J]. *Atmospheric Environment*, 2001, **35**(23): 4033-4039.
- [13] Watson J G, Chow J C, Frazier C. A X-ray Fluorescence analysis of ambient air samples[A]. In: Landsberger S, Creatchman M, eds. *Elemental Analysis of Airborne Particles* [C]. New York: Gordon and Breach, 1999. 67-96.
- [14] 何文权, 叶伯明. 能量色散 X 射线荧光光谱分析大气颗粒中多种元素[J]. *岩矿测试*, 2002, **21**(4): 301-303.
- [15] Chow J C, Watson J G. Ion chromatography in elemental analysis of airborne particles [A]. In: Landsberger S, Creatchman M, (eds.). *Elemental Analysis of Airborne Particles* [C]. New York: Gordon and Breach Publishers, 1999. 539-573.
- [16] 林才浩. 福建沿海土壤地球化学分类及基准值研究[J]. *第四纪研究*, 2005, **25**(3): 347-354.
- [17] U. S. EPA. Particulate matter data analysis workbook [EB/OL]. http://capita.wustl.edu/PMFine/Workbook/PMTopics_PPT/WB_Introduction/Version3/1999-10-22.
- [18] 黄绍文, 金继运, 王泽良, 等. 北方主要土壤钾形态及其植物有效性研究[J]. *植物营养与肥料学报*, 1998, **4**(2): 156-164.
- [19] Watson J G, Zhu T, Chow J C, *et al.* Receptor modeling application framework for particle source apportionment [J]. *Chemosphere*, 2002, **49**(9): 1093-1136.
- [20] Watson J G, Chow J C, Houck J E. PM_{2.5} chemical source profiles for vehicle exhaust, vegetative burning, geological material, and coal burning in Northwestern Colorado during 1995 [J]. *Chemosphere*, 2001, **43**(8): 1141-1151.
- [21] Alloway B J. *Heavy Metals in Soils* [M]. London: Blackie, 1990.
- [22] Chow J C, Watson J G. Contemporary source profiles for geological material and motor vehicle emissions[R]. Report No. DRI 2625. 2F. Prepared for Office of Air Quality Planning and Standards, Environmental Protection Agency, Research Triangle Park, NC, by the Desert Research Institute, Reno, NV, 1994.
- [23] Ho K F, Lee S C, Chow J C, *et al.* Characterization of PM₁₀ and PM_{2.5} source profiles for fugitive dust in Hong Kong [J]. *Atmospheric Environment*, 2003, **37**(8): 1023-1032.

CONTENTS

| | |
|--|---|
| Using Look-up Table Method in the Simulation of Regional Atmospheric Environment | XIE Min, WANG Ti-jian, JIANG Fei, <i>et al.</i> (1409) |
| Applications of Pollutants Released from Crop Residues at Open Burning in Yangtze River Delta Region in Air Quality Model | SU Ji-feng, ZHU Bin, KANG Han-qing, <i>et al.</i> (1418) |
| Atmospheric Dry Deposition Flux and Sources of Monocarboxylic Acids in Beijing and Surrounding Cities | XU Xiao-juan, LI Xing-ru, WANG Yue-si, <i>et al.</i> (1425) |
| Comparison of Physicochemical Characterization of Shanghai Ambient Ultrafine Particles and Engineered Nano Particles and Their Cytotoxicity | ZHANG Rui, LÜ Sen-lin, SHANG Yu, <i>et al.</i> (1431) |
| Element Compositions and Source of PM _{2.5} Aerosols in Qingdao | LI Xiu-zhen, SHENG Li-fang, XU Hua, <i>et al.</i> (1438) |
| Phthalate Esters Pollution in Household Indoor Air Particles of Tianjin in Winter | WANG Fu-mei, CHEN Li, JIAO Jiao, <i>et al.</i> (1446) |
| Application of a Resuspension Test Chamber in PM _{2.5} Source Profile Analysis | DUAN Heng-yi, QIAN Ran-ran, WU Shui-ping, <i>et al.</i> (1452) |
| Distribution and Enrichment of Trace Elements in Coal Combustion Products from Southwestern Guizhou | WEI Xiao-fei, ZHANG Guo-ping, LI Ling, <i>et al.</i> (1457) |
| Air-Water Surface Greenhouse Gas Flux in Pengxi River at Different Operational Stages of the Three Gorges Reservoir | JIANG Tao, GUO Jing-song, LI Zhe, <i>et al.</i> (1463) |
| Fluxes of Greenhouse Gases from Xiangxi River in Summer and Their Influencing Factors | WANG Liang, XIAO Shang-bin, LIU De-fu, <i>et al.</i> (1471) |
| Effects of Elevated Ozone Concentration and Soil Moisture on Temperature Sensitivity of Soil Microbial Respiration in a Cropland | CHEN Shu-tao, ZHANG Yong, HU Zheng-hua, <i>et al.</i> (1476) |
| Hydrochemical Characteristics in the Glacier No. 72 of Qingbingtan, Tomur Peak | ZHAO Ai-fang, ZHANG Ming-jun, LI Zhong-qin, <i>et al.</i> (1484) |
| Mineralization Characteristics of Dissolved Organic Phosphorous in Wudalianchi Lake, China | ZHANG Bin, XI Bei-dou, ZHAO Yue, <i>et al.</i> (1491) |
| Speciation Distribution of Nitrogen in Sediments of 7 Rivers around Taihu Lake | LU Shao-yong, YUAN Ye, JIN Xiang-can, <i>et al.</i> (1497) |
| Distribution and Bioavailability of Nitrogen and Phosphorus Species in the Sediments from Shiwuli Stream in Lake Chaohu | LI Ru-zhong, LI Feng, ZHOU Ai-jia, <i>et al.</i> (1503) |
| Surface Water Quality of Beiyun Rivers Basin and the Analysis of Acting Factors for the Recent Ten Years | GUO Jing, JING Hong-wei, LI Jin-xiang, <i>et al.</i> (1511) |
| Water Quality Impact of Dongjiang River Network Caused by Dongguan Canal Drainage | SUN Lei, MAO Xian-zhong, HUANG Min-min (1519) |
| Groundwater Pollution Sources Identification and Grading in Beijing Plain | LU Yan, HE Jiang-tao, WANG Jun-jie, <i>et al.</i> (1526) |
| 3D Numerical Simulation of Air Sparging Remediation Process | LI Heng-zhen, HU Li-ming, WANG Jian, <i>et al.</i> (1532) |
| Numerical Experiment Study on the Algae Suppression Effect of Vertical Hydrodynamic Mixers | ZOU Rui, ZHOU Jing, SUN Yong-jian, <i>et al.</i> (1540) |
| Microbial Mechanism of Pollutants Removal in New Biological Island Grid | GAO Ming-yu, XIE Hui-jun, WANG Wen-xing (1550) |
| Effect of Nutrition Level of Phosphorus and Nitrogen on the Metabolism of the Extracellular Organic Matter of <i>Nostoc flagelliforme</i> | QI Fei, LIU Xiao-yuan, XU Bing-bing, <i>et al.</i> (1556) |
| Inhibitory Effects of Liquor Cultured with <i>Hydrodictyon reticulatum</i> on the Growth of <i>Microcystis aeruginosa</i> | FU Hai-yan, CHAI Tian, ZHAO Kun, <i>et al.</i> (1564) |
| Removal and Distribution of Phthalate Acid Esters in <i>Potamogeton crispus</i> L. Microcosm of Haihe River | CHI Jie, YANG Qing (1570) |
| Control and Removal of Microcystin Production of <i>Microcystis aeruginosa</i> by Irradiation of Electron Beam | LIU Shu-yu, WU Ming-hong, JIANG Qin-peng (1575) |
| Source Characteristics Analysis of Discharge and Pollutants in Typical Drainage Ditch of Qingtongxia Irrigation District | LI Qiang-kun, HU Ya-wei, LUO Liang-guo (1579) |
| Degradation of TBBPA by Electron Beam Radiolysis | LI Jie, XU Dian-dou, XU Gang, <i>et al.</i> (1587) |
| Catalytic Ozonation of Ibuprofen in Aqueous Solution by Activated Carbon Made from Sludge and Corn Cob | WANG Hong-juan, QI Fei, FENG Li, <i>et al.</i> (1591) |
| Effect of High Hydraulic Loading on Intensive Shrimp Aquaculture Wastewater Treatment Performance in Constructed Wetland | LI Huai-zheng, ZHANG Xing-yi, CHEN Wei-bing, <i>et al.</i> (1597) |
| Factors Influencing the Formation of NDMA During Chloramination Disinfection of Effluent from Biological Nitrogen Removal System for the Treatment of Municipal Sewage | SHANG Xiao-ling, LI Yong-mei (1604) |
| Denitrification Using Starch/PCL Blends as Solid Carbon Source | SHEN Zhi-qiang, WU Wei-zhong, YANG Chun-ping, <i>et al.</i> (1609) |
| Profiles of Zeta Potential and EPS in Granulation Process of Aerobic Sludge | WANG Hao-yu, SU Ben-sheng, HUANG Dan, <i>et al.</i> (1614) |
| Biosorption Characteristics of f2 Bacteriophage onto Activated Sludge | ZHOU Yu-fen, ZHENG Xiang, LEI Yang, <i>et al.</i> (1621) |
| Adsorption of Anionic Polyacrylamide on the Surface of Ion Exchange Membranes | DENG Meng-jie, YU Shui-li, SHI Wen-xin, <i>et al.</i> (1625) |
| Adsorption of Amphoteric Modified Bentonites to Phenol and Its Thermodynamics | LI Ting, MENG Zhao-fu, ZHANG Bin (1632) |
| Effect of Surfactants on Sorption and Desorption of Benzo[a]pyrene onto Black Carbon | ZHANG Jing-huan, CHEN Chun-rong, ZHANG Wei-hang, <i>et al.</i> (1639) |
| Isolation and Identification of Bacteria in the Activated Sludge from Four Sewage Treatment Plants in Nanjing City and Its Antibiotic Resistance Analysis | GE Feng, GUO Kun, ZHOU Guang-can, <i>et al.</i> (1646) |
| Screening and Characterization of Phenol Degrading Bacteria for the Coking Wastewater Treatment | CHEN Chun, LI Wen-ying, WU Jing-wen, <i>et al.</i> (1652) |
| Characteristics of 1,4-Dioxane Degradation by <i>Xanthobacter flavus</i> DTS | JIN Xiao-jun, CHEN Dong-zhi, ZHU Run-ye, <i>et al.</i> (1657) |
| Spatial Quantitative Distribution of Hydrocarbon-Oxidizing Bacteria of Unexploited Oil and Gas Fields | MAN Peng, QI Hong-yan, HU Qing, <i>et al.</i> (1663) |
| Screening and Biological Characteristics of Amphitrophic Methane-Oxidizing Bacteria from Aged-Refuse | ZHAO Tian-tao, XIANG Jin-xin, ZHANG Li-jie, <i>et al.</i> (1670) |
| Distribution Characteristics and Potential Risk of PCBs in Surface Water from 22 Tributaries and Mainstream in Middle Reaches of Yangtze River | LI Kun, ZHAO Gao-feng, ZHOU Huai-dong, <i>et al.</i> (1676) |
| Pollution Characteristics and Potential Risks of Phenolic Compounds in Schistosomiasis Epidemic Areas | WU Zheng-yong, ZHAO Gao-feng, ZHOU Huai-dong, <i>et al.</i> (1682) |
| Spatial Heterogeneity and Autocorrelation of Polycyclic Aromatic Hydrocarbons in the Sediment of Minjiang River in Fuzhou City | CHEN Wei-feng, NI Jin-zhi, YANG Hong-yu, <i>et al.</i> (1687) |
| Heavy Metals Pollution and Its Potential Ecological Risk of the Sediments in Three Gorges Reservoir During Its Impounding Period | WANG Jian-kang, GAO Bo, ZHOU Huai-dong, <i>et al.</i> (1693) |
| Investigation on the Distribution and Potential Ecological Risk of Heavy Metal in the Sediments from Typical Electrical Industrial Zone | DENG Dai-yong, SUN Guo-ping, GUO Ju, <i>et al.</i> (1700) |
| Fraction Distribution and Risk Assessment of Heavy Metals in Iron and Gold Mine Soil of Miyun Reservoir Upstream | GAO Yan-xin, FENG Jin-guo, TANG Lei, <i>et al.</i> (1707) |
| Heavy Metal Contamination and Bioavailability in Huayuan Manganese and Lead/Zinc Mineland, Xiangxi | YANG Sheng-xiang, YUAN Zhi-zhong, LI Zhao-yang, <i>et al.</i> (1718) |
| Evaluation of Heavy Metal Pollution in Soils from a Training Ground Based on GIS | LIU Yu-tong, FANG Zhen-dong, YANG Qin, <i>et al.</i> (1725) |
| Effects of Soil Texture and Water Content on Remediation of SVE on Soils Contaminated by Benzene | LIU Shao-qing, JIANG Lin, YAO Yu-jun, <i>et al.</i> (1731) |
| Characteristics of DNA Adsorption and Desorption in Montmorillonite, Kaoline and Goethite | WANG Shen-yang, RAO Wei, WANG Dai-zhang, <i>et al.</i> (1736) |
| LNAPL Migration Monitoring in Simulated Sand Aquifer Using Resistivity Method | PAN Yu-ying, JIA Yong-gang, GUO Lei, <i>et al.</i> (1744) |
| Preparation and Characterization of Activated Carbon from Rice Straw Pre-treated by the Subcritical Hydrolysis | DONG Yu, SHEN Zhe-min, LEI Yang-ming, <i>et al.</i> (1753) |
| Study on Composting of Cyanobacteria Amended with Different N Loss Inhibitor | REN Yun, CUI Chun-hong, LIU Fen-wu, <i>et al.</i> (1760) |
| Research Progress About Bioremediation of Polycyclic Aromatic Hydrocarbons Contaminated Soil with Immobilized Microorganism Technique | QIAN Lin-bo, YUAN Miao-xin, CHEN Bao-liang (1767) |

《环境科学》第6届编辑委员会

主 编: 欧阳自远

副主编: 赵景柱 郝吉明 田 刚

编 委: (按姓氏笔画排序)

万国江 王华聪 王凯军 王绪绪 田 刚 田 静 史培军
朱永官 刘志培 汤鸿霄 陈吉宁 孟 伟 周宗灿 林金明
欧阳自远 赵景柱 姜 林 郝郑平 郝吉明 聂永丰 黄 霞
黄 耀 鲍 强 潘 纲 潘 涛 魏复盛

环 境 科 学

(HUANJING KEXUE)

(月刊 1976年8月创刊)

2012年5月15日 33卷 第5期

ENVIRONMENTAL SCIENCE

(Monthly Started in 1976)

Vol. 33 No. 5 May 15, 2012

| | | | | |
|---------|--|------------------|----|---|
| 主 管 | 中国科学院 | Superintended | by | Chinese Academy of Sciences |
| 主 办 | 中国科学院生态环境研究中心 | Sponsored | by | Research Center for Eco-Environmental Sciences, Chinese Academy of Sciences |
| 协 办 | (以参加先后为序) 北京市环境保护科学研究院 清华大学环境学院 | Co-Sponsored | by | Beijing Municipal Research Institute of Environmental Protection School of Environment, Tsinghua University |
| 主 编 | 欧阳自远 | Editor-in -Chief | | OUYANG Zi-yuan |
| 编 辑 | 《环境科学》编辑委员会 北京市2871信箱(海淀区双清路 18号, 邮政编码:100085) 电话:010-62941102, 010-62849343 传真:010-62849343 E-mail: hjkx@rcees. ac. cn http://www. hjkx. ac. cn | Edited | by | The Editorial Board of Environmental Science (HUANJING KEXUE) P. O. Box 2871, Beijing 100085, China Tel:010-62941102, 010-62849343; Fax:010-62849343 E-mail: hjkx@rcees. ac. cn http://www. hjkx. ac. cn |
| 出 版 | 科 学 出 版 社 北京东黄城根北街16号 邮政编码:100717 | Published | by | Science Press 16 Donghuangchenggen North Street, Beijing 100717, China |
| 印 刷 装 订 | 北京北林印刷厂 | Printed | by | Beijing Bei Lin Printing House |
| 发 行 | 科 学 出 版 社 电话:010-64017032 E-mail: journal@ mail. sciencep. com | Distributed | by | Science Press Tel:010-64017032 E-mail: journal@ mail. sciencep. com |
| 订 购 处 | 全国各地邮电局 | Domestic | | All Local Post Offices in China |
| 国外总发行 | 中国国际图书贸易总公司 (北京399信箱) | Foreign | | China International Book Trading Corporation (Guoji Shudian), P. O. Box 399, Beijing 100044, China |

中国标准刊号: ISSN 0250-3301
CN 11-1895/X

国内邮发代号: 2-821

国内定价: 70.00元

国外发行代号: M 205

国内外公开发行